






# LAIKA

# EL

1 9 3 2 5 N monofase

Serie Accavallati

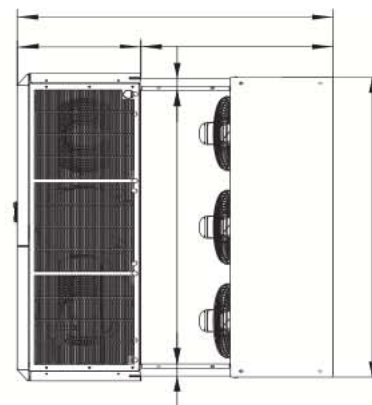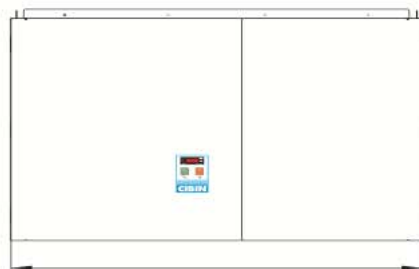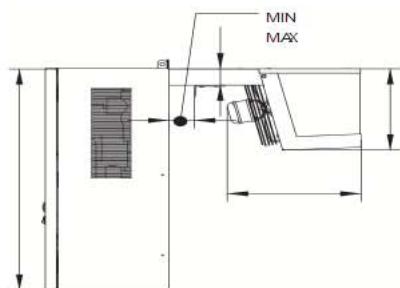

DATI TECNICI	TECHNICAL DATA	DOMINIES TECHNIQUES	TECHNISCHE DATEN	CARACTERÍSTICAS TÉCNICAS	
Tensione	Voltage	Tension	Spannung	Tensión	230V IP/50Hz±N
Corrente nominale	Rated current	Courant nominal	Nennstrom	Corriente nominal	19,9 A
Tipo refrigerante	Refrigerant type	Type du gaz	K itemittel	Tipo refrigerante	R404A
Tipo compressore	Compressor type	Type compresseur	Kompresortyp	Tipo compresor	E
Pot. nominale	Power rating	Puissance nominale	Nennleistung	Potencia nominal	19 CV
Condensatore	Condenser	Condenseur	Verflüssiger	Condensador	
Passo alette	Fin spacing	Escart ailettes	Lamellenabstand	Paso aletas	2,5 mm
Ventilatori	Fans	Ventilateurs	Ventilatoren	Ventiladores	3 x 254 mm
Pot. nom. assorbita	Nom. power consumption	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. nominal. absorbida	219 W
Portata d'aria	Air volume	D bit d'air	Volumenstrom	Caudal aire	2250 m <sup>3</sup> /h
Evaporatore	Evaporator	Évaporateur	Verdampfer	Evaporador	
Passo alette	Fin spacing	Écartement ailettes	Lamellenabstand	Paso aletas	4,2 mm
Sbrinatorio	Defrosting	Dégivrage	Abtauung	Desescarche	G
Espansione	Expansion	Expansion	Expansion	Expansión	V
Ventilatori	Fans	Ventilateur	Ventilator	Ventiladores	3 x 254 mm
Pot. nom. assorbita	Nom. power consumption	Puiss. nom. absorbée	Nennleistungsaufnahme	Pot. nominal. absorbida	219 W
Portata d'aria	Air volume	D bit d'air	Volumenstrom	Caudal aire	2100 m <sup>3</sup> /h
Freccia d'aria	Air throw	Projection d'air	Reichweite	Flecha de aire	9 m
Codice	Code	Code	Kodex	Código	999903411

- E Emettico - Hemmetic - Hemetique - Völlhemetisch - Hermético
- S Semiemmettico - Semihemmetic - Semi-hemetique - Halbhermetisch - Semihermético
- G Gas caldo - Hot gas - Gaz chaud - Heissgas - Gas caliente
- C Capillare - Capillary - Capillaire - Kapillar - Capilar
- V Valvola termostatica - Expansion valve - D tendeur thermostatique - Thermostatisches Expansionsventil - Válvula termostática

RESA - CAPACITÀ - PUISSANCE - LEISTUNG - RENDIMENTO												
Tc (°C)	-2				0				+6			
Ta (°C)	27	32	38	43	27	32	38	43	27	32	38	43
P (W)	3249	3043	2796	2590	3532	3308	3039	2816	3815	3573	3283	3042
V (m <sup>3</sup> )	42,65	39,95	36,71	34,01	46,36	43,42	39,90	36,96	50,70	46,90	43,09	39,92

- Tc Temperatura cella - Cold room temperature - Température chambre froid - Kälteumtemperatur - Temperatura cámara
- Ta Temperatura ambiente - Ambient temperature - Température ambiante - Umgebungstemperatur - Temperatura ambiente
- P Potenza frigorifera - Cooling capacity - Puissances frigorifiques - Kälteleistung - Potencia frigorífica
- V Volume cella - Coldroom volume - Volume chambre - Kältezellenvolumen - Volumen cámara

Peso lordo - Gross weight - Poids brut - Bruttogewicht - Peso bruto  
 Peso netto - Net weight - Poids net - Nettogewicht - Peso neto  
 Volume - Volume - Volume - Volumen - Volumen  
 Forma - Form - Forme - Form - Forma

176 kg  
 128 kg  
 1,33 m<sup>3</sup>  
 E

